

Skybolt CLoc® 2000 Series Common Sets

Forget Charts - The followings assemblies solve 99% of all applications



Stainless Series - Flush Head

Skytanium® Series - Flush Head

SK28S3-SET1 \$7.04	Total Grip Range	ZG28S3-SET1 \$7.04	Total Grip Range
SK28S3-2S Phillips Stud SK2600-LWS Stud Retainer SK213-28 Adjustable Receptacle 1/8" Rivets	.020-.340	ZG28S3-2 Phillips Stud SK2600-LWS Stud Retainer SK213-28 Adjustable Receptacle 1/8" Rivets	.020-.340

Most Common Aircraft Set

Most Common NASCAR Set



Stainless Series - Protruding Head

Skytanium® Series - Protruding Head

SK26S51-SET1 \$7.26	Total Grip Range	ZG2600-SET1 \$7.28	Total Grip Range
SK26S51-1S Phillips Stud SK2600-LWS Stud Retainer SK213-28 Adjustable Receptacle 1/8" Rivets	.020-.400	ZG2600-1 Collared Slot Stud SK2600-LWS Stud Retainer SK213-28 Adjustable Receptacle 1/8" Rivets	.020-.400



ZG28S3/SK28S3



ZG2600




SK26S51



SK213-28

What does Overlap Mean?

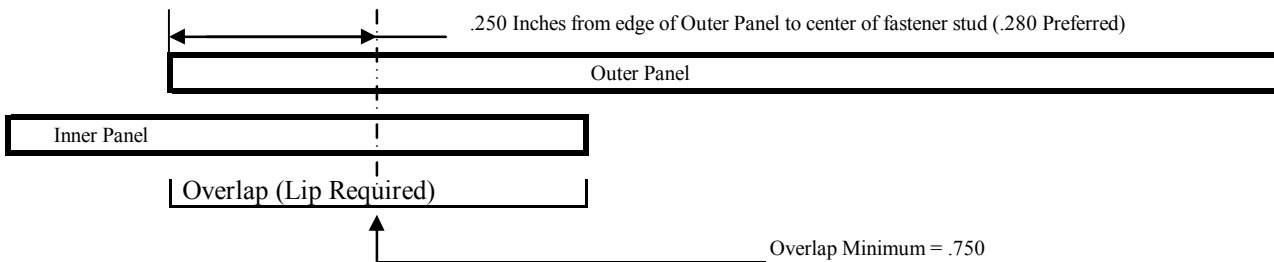


Installation Tools Required -

Template-213	Template to drill rivet holes with #30 Drill	\$1.25
--------------	--	--------

Skybolt CLoc® 4000 Series Common Sets

Forget Charts - The followings assemblies solve 99% of all applications

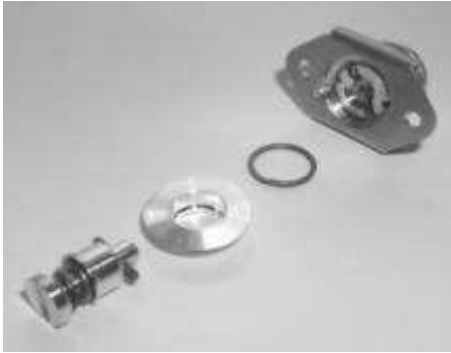

SK40S5S



ZG4002

Stainless Series

SK40S5-SET1	\$10.80	Total Grip Range
SK40S5-2S Phillips Head		.010 - .310
SK-OS Panel Grommet (.094 max thickness)		
SK-R4G Stud/Grommet Retainer		
SK245-5 Adjustable Receptacle 1/8" Rivets		
Use for any applications with inner flange mounting width of 1-1/4" or greater		

Skytanium® Series

ZG4002-SET1	\$11.16	Total Grip Range
ZG4002-2 Collared Slot		.010 - .310
ZG-094LA Panel Grommet (.094 max thickness)		
SK-R4G Stud/Grommet Retainer		
SK245-5 Adjustable Receptacle 1/8" Rivets		
Use for any applications with inner flange mounting width of 1-1/4" or greater		


Note (1)

Note (2)

Note 1 - OS Grommet Restrictions - Minimum Combined Total Thickness must be greater than .116. Max Outer Panel Thickness = .094

Note 2 - SK245-5 Floating Receptacles require inner panel overlap of 1.125".

What does Overlap Mean?

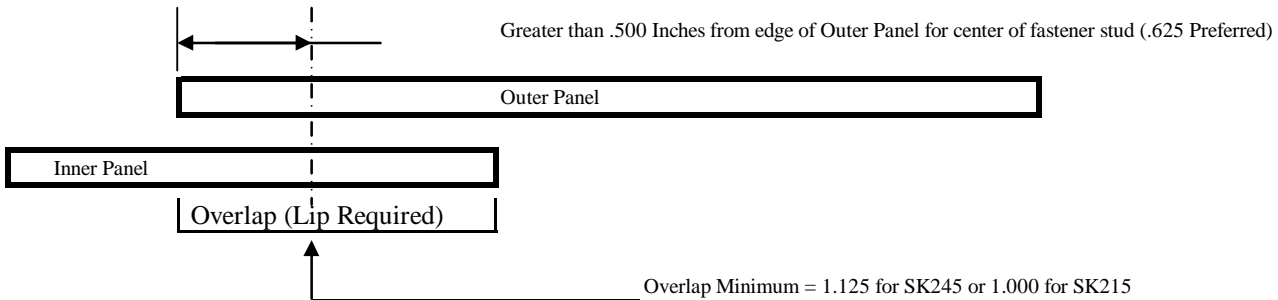

Installation Tools Required -

SK-SP5	Receptacle Adjustment Tool and Retainer Installation Tool	\$29.00
Template-215	Template to drill rivet holes with #30 Drill	\$1.25
Template-245	Template to expand center hole with Unibit-3 Stepdrill	\$1.25